

LEX50 Ex ta/tb certified resistance thermometer for zone 1, 2 and 20, 21, 22

Construction

ATEX execution	II 1 D Ex ta IIIC T85°C...T300°C Da II 1/2 D Ex ta/tb IIIC T85°C...T300°C Da/Db II 2 D Ex tb IIIC T85°C...T300°C Db
ATEX certificate	DEKRA 17ATEX0123 X
IECEx execution	Ex ta IIIC T85°C...T300°C Da Ex ta/tb IIIC T85°C...T300°C Da/Db Ex tb IIIC T85°C...T300°C Db
IECEx certificate	IECEx DEK 17.0046X
Suitable for zone	1, 2 and 20, 21, 22
Ingress protection	IP65 / IEC529
Ambient temp. range	-40°C...+75°C, this can be limited depending on the materials applied such as cables, connection heads, junction boxes and transmitters.

Sheath

Construction	Mineral insulated (MgO)
Material	SS316 standard, other materials possible
Diameter "D"	Customer to specify (0.25-12.7mm)
Length	Customer to specify

Sensor


Execution	Single or Duplex Pt100
Connection	3-wire standard, 4-wire optional
Accuracy	According IEC 60751 Cl. B, A or AA
Measuring range	-20°C...+400°C standard, -220°C...+600°C optional

Sealpot

Length	45mm
Diameter	To suit cable diameter

Connection cable

Cable insulation	PVC, PUR, Silicon or PTFE. Customer to specify
Cable length	Customer to specify

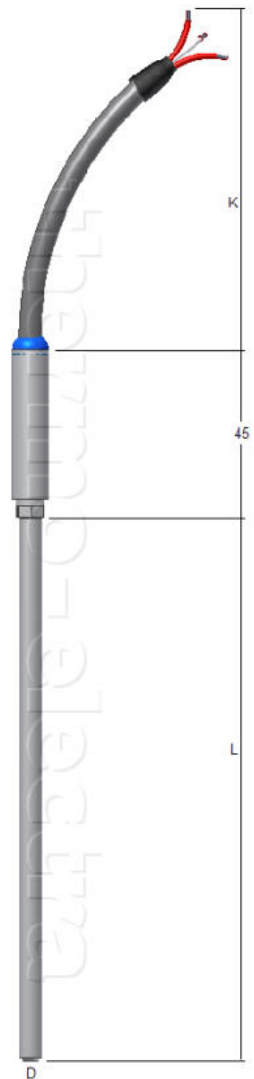

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	LEX50						
Sensor S or D							
Connection 3- or 4-wire							
Class B, A or AA							
Diameter "D" in mm							
Length "L" in mm							
Length "K" in mm							