

ME 7094 Tube-skin RTD with sleeve and bracket

Sheath

Construction	Mineral insulated (MgO)
Material	SS 316 - (Wst 1.4401) standard, other materials possible
Diameter	6.0mm standard, other diameters possible

Connection head

Model	CE with screw cover (shown), other connectionheads possible
Material	Aluminium, plastic or stainless steel
Cable gland	M20x1.5 included standard, other threads possible

Sensor

Detector	Single or Duplex Pt100
Accuracy	According IEC 60751 class B, A or AA
Style / Connection	3-wire system standard, 4-wire system optional
Range	-220 / +200°C

Strap-on Sleeve

Dimensions	70 x 14 x 14mm standard, other dimensions possible
Material	SS316, SS310, Mild steel, Incoloy, Inconel or other materials possible

Bracket


Material	Stainless steel
Mounting	With stainless steel clamps, included

Head extension

Material	Stainless steel
-----------------	-----------------


Options

Certification	ATEX or IECEx certified Exe, Exi or Exd
Transmitter 4-20mA	In-Head transmitter, standard or Explosion proof. Please select from our standard range
Swing-Cover head	Transmitter direct mounted on measuring insert, or in the cover

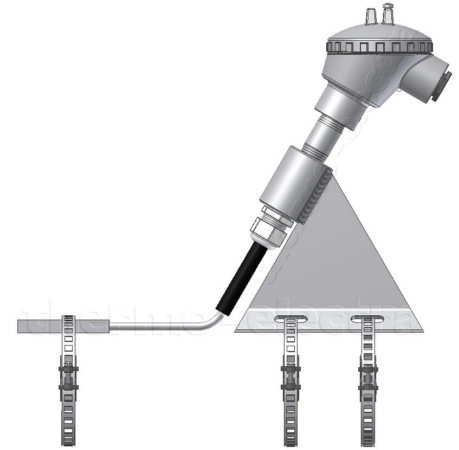

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

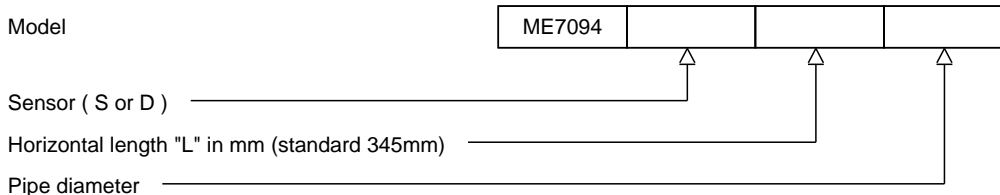

H2-1 Rev.0 6/15