



TE1134 Standard stripanel 3-pole

Application	
Contacts	Springloaded contacts 3-poles, one ground
Third contact	Copper contact for drain/ground
Number of circuits	
Circuits	Available 2 to 12 circuits
Temperature rating	
Temperature limit	Maximum 205°C (260°C intermittent)
High temperature version	Maximum 425°C (540°C intermittent), add leter H
Construction	
Body	Glass filled thermoplastic material
Design	Solid single piece, T-nut panel fastening from the front
Identified	Scratchproof numbering
Dimensions	
Height	57,2mm
Width	19mm x number of circuits

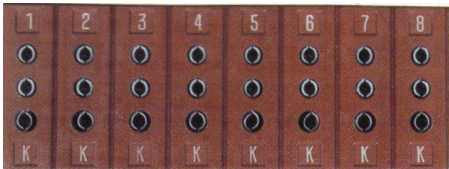

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

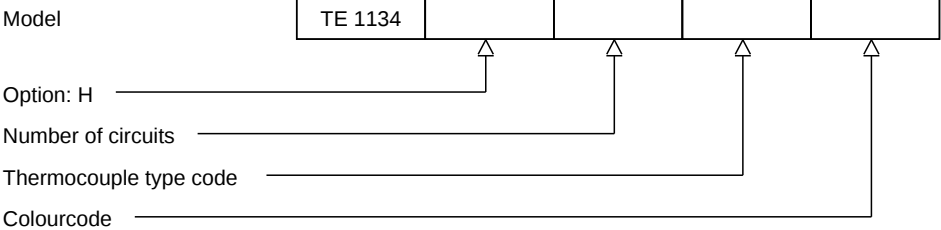

H9-2 Rev. 0 07/07