


# TE1034 Standard panel jack 3-pole with lugs

## Application

- Female panel connector** Thermocouple and RTD circuits
- Third connection** Third connection for ground, continuous shield or for three wire RTD.


## Construction

- Contacts** Springloaded Cu, or thermocouple contacts
- Materials** Glass filled thermoplastic body with original thermocouple material contacts
- Temperature limit** Maximum 220°C
- Body** Glass filled thermoplastic material
- Molded barriers** Prevent short circuit
- Wire size** From 0,2mm to 2,0mm.



## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

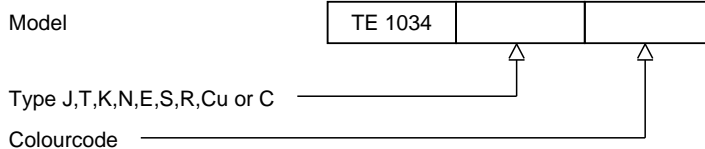

H9-2Rev.0 7/07