

# ME 2072 General purpose resistance thermometer with FEP/PFA cable

## Sheath


<b>Construction</b>	Mineral insulated
<b>Material</b>	SS 316 - (Wst 1.4401) standard, other materials possible
<b>Diameter "D"</b>	3 or 6 mm, customer to specify
<b>Length "K"</b>	Customer to specify

## Lead wire

	FEP/PFA insulated flexible cable with tinned copper braiding, 240 °C
<b>Lead wire length "L"</b>	Customer to specify


## Sensor

	Single or Duplex Pt100
<b>Accuracy</b>	According IEC 60751 Cl. B, A or AA
<b>Style / Connection</b>	3-wire system standard, 4-wire system optional
<b>Range</b>	Standard -20 / +400°C, optional -220 / +600°C
<b>Testing</b>	Tested at 500 Vdc / 20°C
<b>Insulation resistance</b>	Minimum 100Mohm

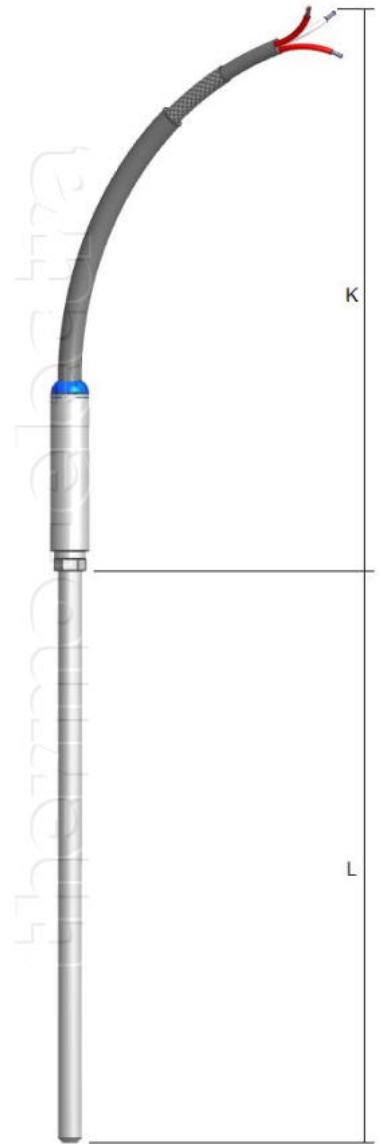

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

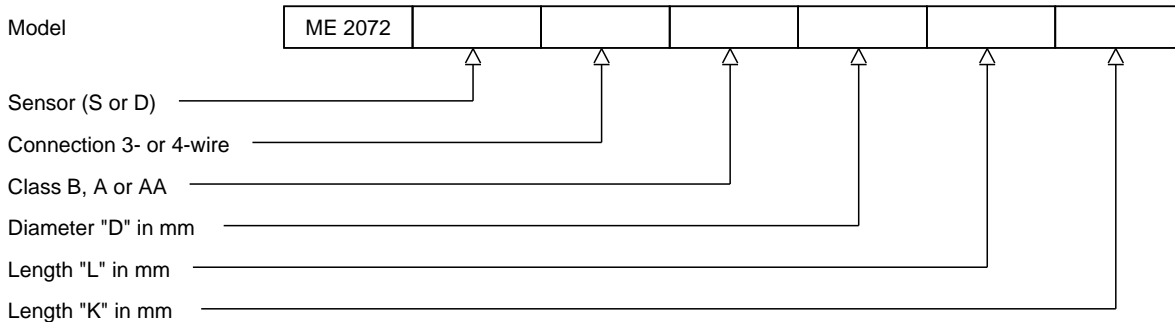

H2-1 Rev.0 7/07