


PCA LEMO Jack

Application	
Application	Laboratory, R&D, Aviation and other high demanding environments.
Snap action	Ideal for quick disconnection of the sensor
Materials	Housing: Nickel plated Brass2 or 4 Soldering contacts, Gold plated Brass.Insulation: PEEK
Temperature rating	Maximum temperature 260°C.
Style / Connection	
Snap action	LEMO-Connector snap action system
Connector size	
Size:	0 for cable diameter max. 3,7 mm.Lxd 34,5x9mm1 for cable diameter max. 3,7 mm.Lxd:42,5x12mm2 for cable diameter max. 4,2 mm.Lxd:52x15mm3 for cable diameter max. 6,2 mm.Lxd:59x18mm
Options	
Environmental	Watertight versions
Contact	Multiple contact receptacles
Materials	Other contact materials possible



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

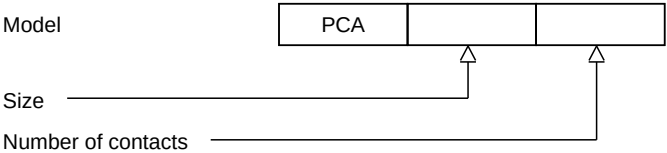

H9-1 Rev.0 7/07