



# TE1310 Mini jack up to 540°C

|                           |                                                                              |
|---------------------------|------------------------------------------------------------------------------|
| <b>Application</b>        |                                                                              |
| Connector                 | Thermocouple and RTD circuits                                                |
| Design                    | Suited for small wires and mineral insulated cables                          |
| Materials                 | Glass filled thermoplastic body with original thermocouple material contacts |
| <b>Temperature rating</b> |                                                                              |
| Temperature limit         | Maximum 540°C, 425°C continuous                                              |
| <b>Construction</b>       |                                                                              |
| Body                      | Glass filled thermoplastic material                                          |
| Design                    | Rugged one body design                                                       |
| Molded barriers           | Prevent short circuit                                                        |
| <b>Wire size</b>          |                                                                              |
| Accepts wires             | From 0,002 mm to 0,6 mm                                                      |
| Cable jacket diameter     | Maximum 4,5 mm.                                                              |
| Optional accessories      | See separate datasheet                                                       |
| <b>Colourcode</b>         |                                                                              |
| Available colors          | Brown only, without color pigment. Thermocouple calibration printed          |

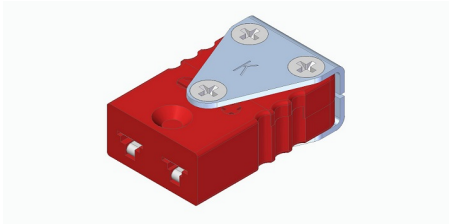

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

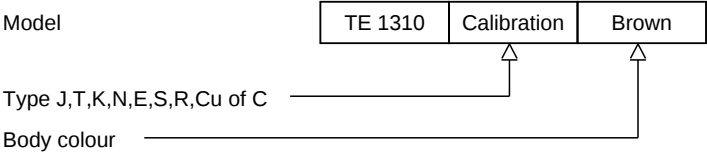

H9-1 Rev.0 7/07