


DD 3030 Socket weld thermowell – straight

Thermowell	
Design	Drilled bar stock (solid machined)
Process connection	Socket weld
Welding diameter	26.7mm, 33.4mm or 48.3mm
Material	SS 316 - (Wst1.4401)
Stem / Shaft	
Wetted part	Straight
Diameter	To specify
Insertion length	To specify
Bore Size	6.5 mm standard
Excentricity	< 1 micrometer
Bottom thickness	5 mm
Connection length	
Standard length	50mm
Female connection	
Threaded	1/2"NPT, 1/2"BSP, M20x1.5 or other threads possible
Options	
Other materials and dimensions	
Plug and chain for test well	
Protective coating, PTFE, Halar, Stellite etc.	
Tagging	
Wake frequency calculation	

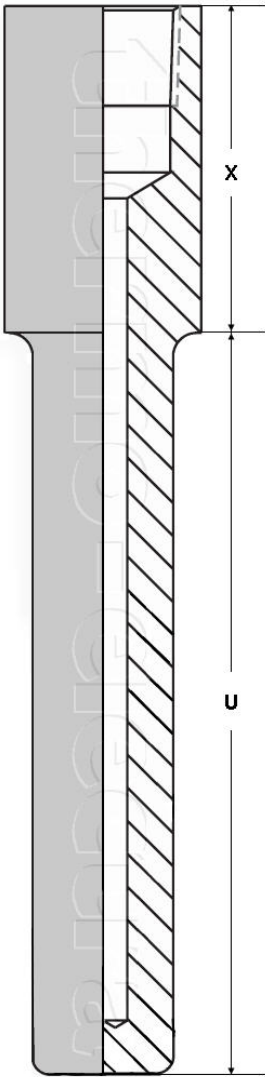

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	DD 3030				
Diameter welding neck in mm					
Insertion diameter in mm					
"U" length in mm					
"X" length in mm					