

DD 3020 Socket weld thermowell – tapered

Thermowell

Design	Drilled bar stock (solid machined)
Process connection	Socket weld
Welding diameter	26.7mm, 33.4mm or 48.3mm
Material	SS 316 - (Wst1.4401)

Stem / Shaft

Wetted part	Tapered
Diameter	Root and tip diameter to specify, standard 25 to 20mm.
Insertion length	To specify
Bore Size	6.5 mm standard
Excentricity	< 1 micrometer
Bottom thickness	5 mm

Connection length


Standard length	50mm
------------------------	------

Female connection

Threaded	1/2
-----------------	-----

Options

- Other materials and dimensions
- Plug and chain for test well
- Protective coating, PTFE, Halar, Stellite etc.
- Tagging
- Wake frequency calculation

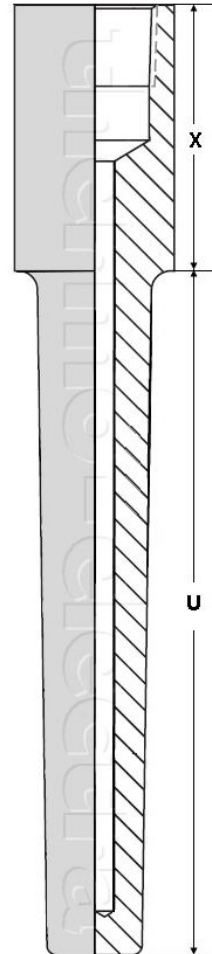

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

