


FF 3090 Thermowell for cover flange

Thermowell	
Design	Drilled bar stock for cover flange mounting Made from one piece bar, forging, or bar with welded flange
Materials	SS 316 - (Wst 1.4401) standard
Stem / Shaft	
Diameter	20 mm straight or a reduced tip (L=78mm x d=12 mm)
Bore	Stepped 8.0mm to 6.5 mm at the tip side
Bottom thickness	5.0 mm
Flange facing	Flat Face Serrated to ASME B16.5
Cover flange	
Separate available	To specify
Pipe class	DN25, DN40 or DN50
Class	150, 300, 600, 900/1500 and 2500Lbs
Dimensions	
Insertion length	To specify
Flange size	51mm (DN25), 73mm (DN40) or 92mm (DN50),To specify
Options	
Other materials and dimensions	
Fully machined from bar, no weldings	
Knurled tip	
Protective coating, PTFE, Halar, Stellite etc.	
Tagging	
Wake frequency calculation	

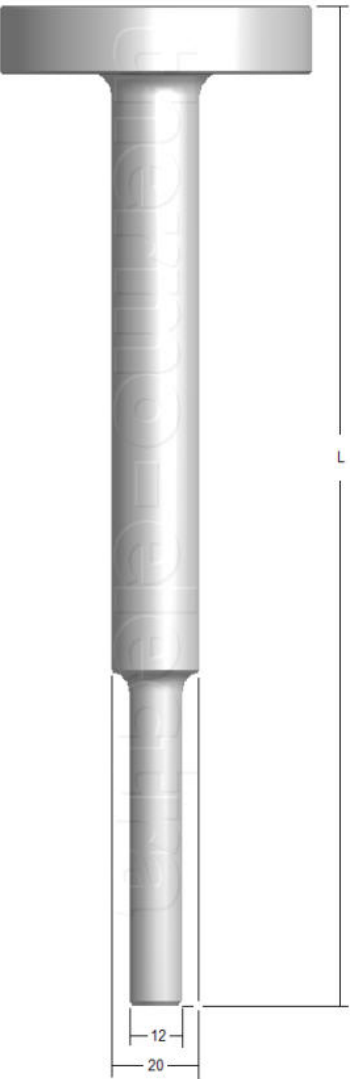

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	FF 3090					
Flange size						
"L" length in mm						
Straight or stepped						
Material						
Options						

H3-1 Rev.0 7/07