

# T12 Glassfibre insulated thermocouple wire up to +540°C

## Insulation material

Each wire and overall jacket, high temperature resistant braided material

## Shape

Flat

## Insulation

Glass fibre

## Moisture resistance

Poor

## Temperature limits

0/+540°C

## Conductors

Solid, parallel

## Conductor sizes

0.2, 0.5, 0.8 or 1.0mm

## Calibration

### Thermocouple type

K, T, J, E, N, U or L

Batch certificate


Calibration certificate

## Options



## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

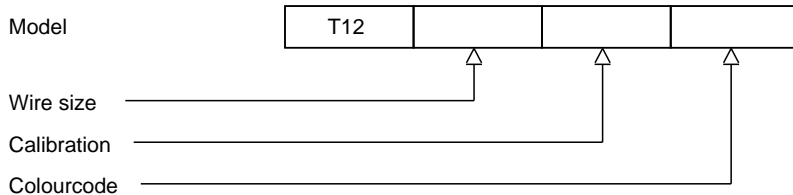

H8-1 Rev. 07/07