


T05 PFA insulated twisted thermocouple wire -75°C to +250°C

| | |
|----------------------------|--|
| Insulation material | Each wire high quality extruded PFA |
| Shape | Twisted pair |
| Moisture resistance | Excellent |
| Temperature limits | -75/+250°C |
| Conductors | |
| Conductor sizes | Solid 0.03, 0.07, 0.2, 0.5 or 0.8mm Stranded 0.124 or 0.22mm ² |
| Calibration | |
| Thermocouple type | K, T, J, E, N, U or L |
| Accuracy | According IEC 60584 / ANSI MC96.1 |
| Colour code | According thermocouple calibration IEC, ANSI, BS etc. |



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

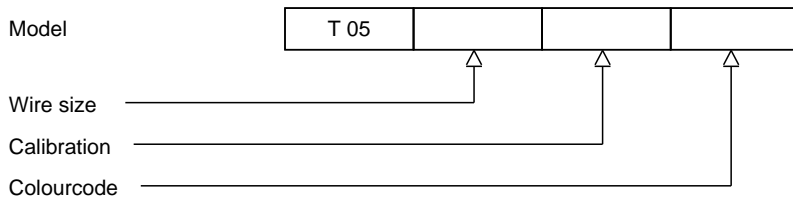

H8-1 Rev. 07/07