


DWR 6055 Vibration proof resistance thermometer

Design	Designed for use on combustion engines
Protection tube	
Construction	Bar stock drilled thermowell
Material	SS 316 - (Wst 1.4401)
Insertion length "L"	Customer to specify, standard 150 mm
Diameter	Conical 18 to 12 mm
Process connection	1/2" BSP
Extention length "X"	Standard 50 mm
Cable	
	Heat and oil resistant armoured extension cable, 250°C
Cable length "K"	Customer to specify, standard 1000 mm
Sensor	
	Pt100
Style / Connection	3 wire system (Optional 4 wire system)
Accuracy	According IEC 751 Class B
Testing	Tested 200 Volt @ 20°C
Insulation	Minimum 100 M ohm
Design	Vibrationproof
Temperature	
	600 °C maximum

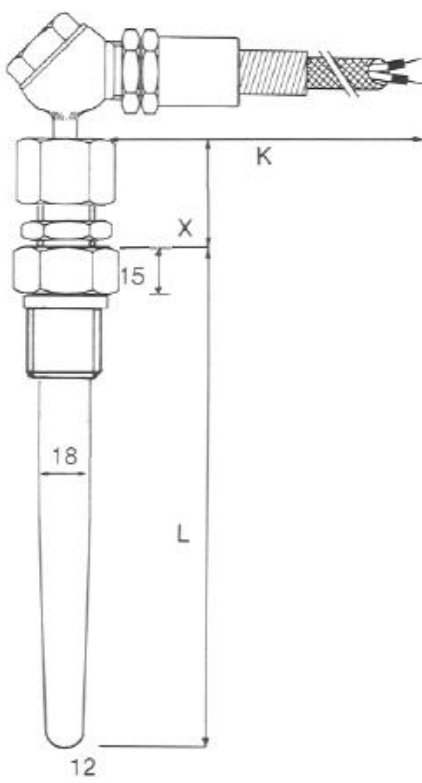

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	DWR 6055		
Length "K" in mm			
Length "L" in mm			