

# DWR 6010 Vibration proof resistance thermometer

## Design

Designed for use on combustion engines and turbines

## Protection tube

### Construction

Closed-end tube

### Material

SS 316 - ( Wst 1.4401 ) standard, other materials possible

### Insertion length

150mm standard, other lengths possible

### Diameter

8.0mm standard, other diameters possible

### Process connection

1/4"BSP (G1/4"), 1/4"NPT, 1/2"BSP (G1/2"), 1/2"NPT or other threads possible

## Pocket / Thermowell

Small diameter sensors can break due to high vibrations, the use of a thermowell or pocket can be imperative, check with your engine manufacturer or consult factory.

## Cable

Heat and oil resistant, armoured extension cable 250 °C

### Cable length

1000mm standard, other lengths possible

## Sensor

Single or Duplex Pt100

### Style / Connection

3-wire system standard, 4-wire system optional

### Accuracy

According IEC 60751 class B

### Testing

Tested 200 Volt / 20°C

### Insulation


Minimum 100Mohm

### Design

Vibrationproof

### Temperature


600°C maximum

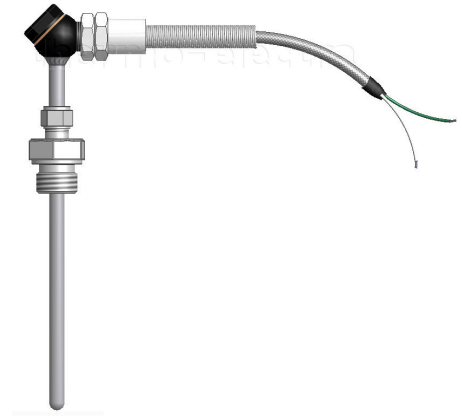

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model



Lengte "L" in mm

Length "K" in mm

H6-1 Rev. 07/07