DWR 6080 Cargo resistance thermometer

Design	
	Designed for use on ships
Type Approval	LLoyds Register Marine
Category	LV2000 range
Protection tube	
	Rubber covered tube
Material	SS 316 - (Wst 1.4401) standard, other materials possible
Outerdiameter	16mm standard, other diameters possible
Mounting hole	11mm standard, other diameters possible
Cable	
	Rubber insulated flexible cable
Cable length	7000mm standard, other lengths possibel
Sensor	
	Single or Duplex Pt100
Style / Connection	3-wire system standard, 4-wire system optional
Accuracy	According IEC 60751 class A
Range	-30 / +60°C
Testing	Tested 200 Volt @ 20°C
Insulation	Minimum 100 M ohm
Protection	IP 65

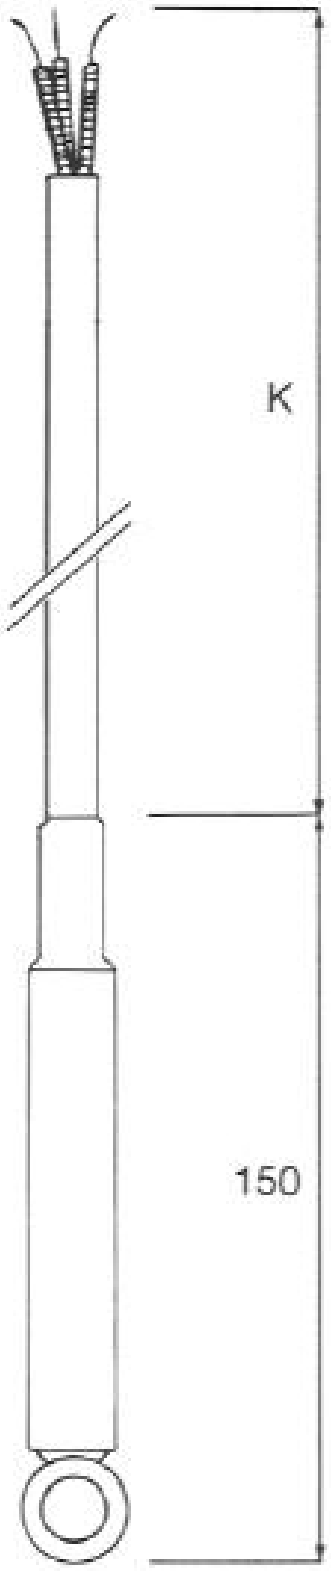

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model | DWR 6080 | |

Length "K" in mm

H6-1 Rev. 07/07

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
http://www.thermo-electra.com