

# WF 5820 Adjustable bayonet resistance thermometer

## Construction

<b>Insertion length</b>	Springloaded
<b>Diameter</b>	8 mm
<b>Bayonet</b>	Diameter 15 mm, two slots
<b>Spring</b>	Length 200 mm

## Cable

PTFE insulated flexible cable with stainless steel braiding, 240°C

<b>Cable length</b>	Customer to specify ( 3000 mm standard )
---------------------	--

## Tip length

Customer to specify 16 or 40 mm

## Temperature

400°C maximum

## Sensor

Single Pt 100

<b>Accuracy</b>	According IEC 751 class B
-----------------	---------------------------

<b>Style / Connection</b>	3 wire system
---------------------------	---------------

## Bayonet adaptor

Please order separately

<b>Model A1</b>	Process connection 1/4"BSP
-----------------	----------------------------


<b>Model A2</b>	Process connection 3/8"BSP
-----------------	----------------------------

<b>Model A3</b>	Process connection M14 x 1.5
-----------------	------------------------------



## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

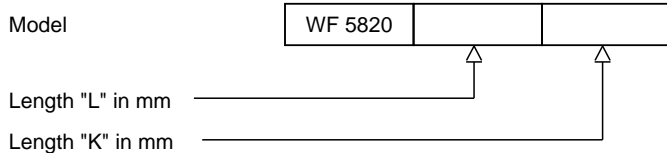

H5-1 Rev. 07/07