

WF 5800 Adjustable bayonet resistance thermometer

Construction

Insertion length	Springloaded
Diameter	6 mm
Bayonet	Diameter 12.2 mm, one slot
Spring	Length 200 mm
Temperature	400°C maximum

Cable

PTFE insulated flexible cable with stainless steel braiding, 240°C

Cable length 3000mm standard, other lengths possible

Sensor

Single Pt100

Accuracy According IEC 60751 class B

Style / Connection 3-wire system standard, 4-wire system optional

Bayonet adaptor


Please order separately

Model C6 Process connection M12 x 1.75



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

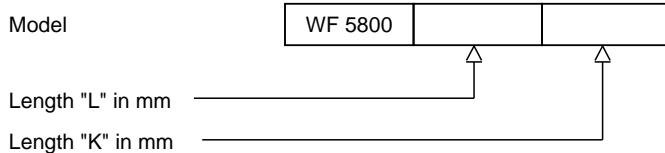

H5-1 Rev. 07/07