

# TF 5895 Washer style thermocouple

## Construction

<b>Gasket</b>	Hole diameter 5.0mm standard, other diameters possible
<b>Material</b>	Brass standard, other materials possible
<b>Outer diameter</b>	12mm standard, other diameters possible
<b>Thickness</b>	6.0mm standard, other thicknesses possible

## Extension cable

Teflon insulated flexible thermocouple cable, with steel wire braiding  
240°C

<b>Length</b>	3000mm standard, other lengths possible
---------------	---


## Thermocouple

<b>Calibration</b>	K, T, J, E, N, U or L
<b>Accuracy</b>	According IEC 60584 / DIN 43710
<b>Hot junction</b>	Grounded



## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

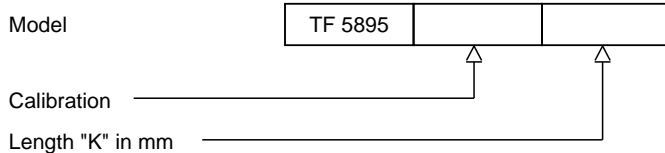

H5-1 Rev. 07/07