MI 2026 resistance thermometer insert for 4-20mA transmitter

Sheath	
Construction	Welded bottom
Material	SS 316 - (Wst 1.4401) standard, other materials possible
Insertion length	Customer to specify
Style / Connection	
Application	For mounting
Construction	Springloaded according DIN 43762
Wires	60 mm, insulated wires
Sensor	
	Single or Duplex Pt100
Accuracy	According IEC 60751 class B
Style / Connection	3-wire system standard, 4-wire system optional
Range	-220 / + 600 °C
Insulation material	Mineral insulated (MgO)
Testing	Tested 200 Volt @ 20°C
Insulation resistance	Minimum 100 M ohm
Options	
Accuracy	Class B, A or AA
Style / Connection	2 wire or 4 wire
	2 wire with compensationloop
	Customer to specify separately

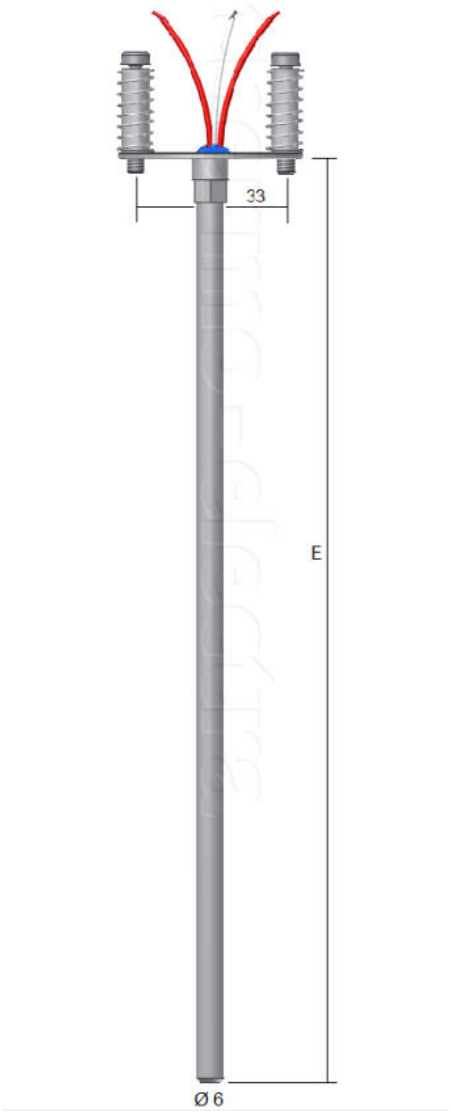

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	MI 2026		

Sensor (S or D)

Length "E" in mm

H2-1 Rev.0 7/07

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
http://www.thermo-electra.com