# ME 1062 Mineral insulated thermocouple with PTFE cable and SS protection hose

| | |
|---|---|
| **Sheath** | |
| **Construction** | Bendable mineral insulated |
| **Material** | SS 316 - (Wst 1.4401) Also available in SS310, Inconel 600, Hasteloy X and Nicrosil D |
| **Insulation** | MgO |
| **Diameter** | Customer to specify |
| **Length** | Customer to specify |
| **Extension cable** | |
| | PTFE insulated flexible cable with stainless-steel flexible hose, 240°C |
| **Cable length** | Customer to specify |
| **Thermocouple** | |
| **Calibration** | K, T, J, E, N, U or L |
| **For duplex** | KK, TT, JJ, EE, NN, UU or LL |
| **Accuracy** | According IEC 60584 |
| **Hot junction** | Insulated |
| **Testing** | Tested 500 Volt @ 20 °C |
| **Insulation resistance** | Minimum 100 M ohm |
| **Available diameter** | (0.25 - 0.5 - 1.0)* 1.5 - 2.0 - 3.0 - 4.5 |
| | 6.0 and 8.0 mm. |
| | Other diameters possible |
| | * single only |

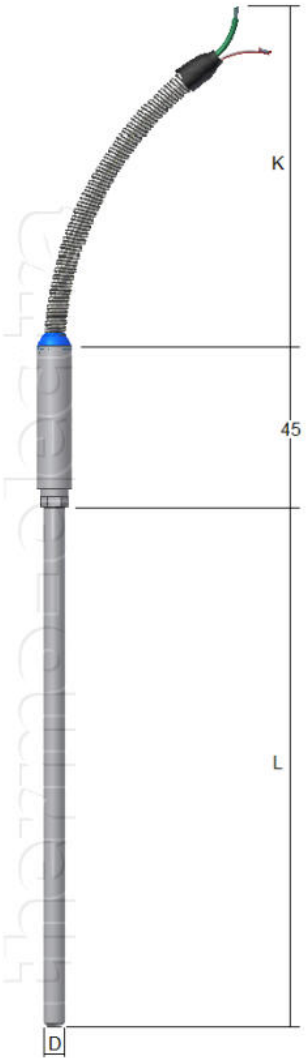


## Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

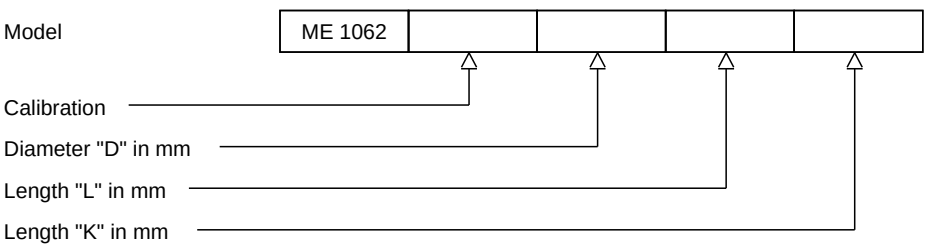




Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
http://www.thermo-electra.com