

ME 1062 Mineral insulated thermocouple with PTFE cable and SS protection hose

Sheath


Construction	Bendable mineral insulated
Material	SS 316 - (Wst 1.4401) Also available in SS310, Inconel 600, Hasteloy X and Nicrosil D
Insulation	MgO
Diameter	Customer to specify
Length	Customer to specify

Extension cable

	PTFE insulated flexible cable with stainless-steel flexible hose, 240°C
Cable length	Customer to specify

Thermocouple

Calibration	K, T, J, E, N, U or L
For duplex	KK, TT, JJ, EE, NN, UU or LL
Accuracy	According IEC 60584
Hot junction	Insulated
Testing	Tested 500 Volt @ 20 °C
Insulation resistance	Minimum 100 M ohm
Available diameter	(0.25 - 0.5 - 1.0)* 1.5 - 2.0 - 3.0 - 4.5 6.0 and 8.0 mm. Other diameters possible * single only

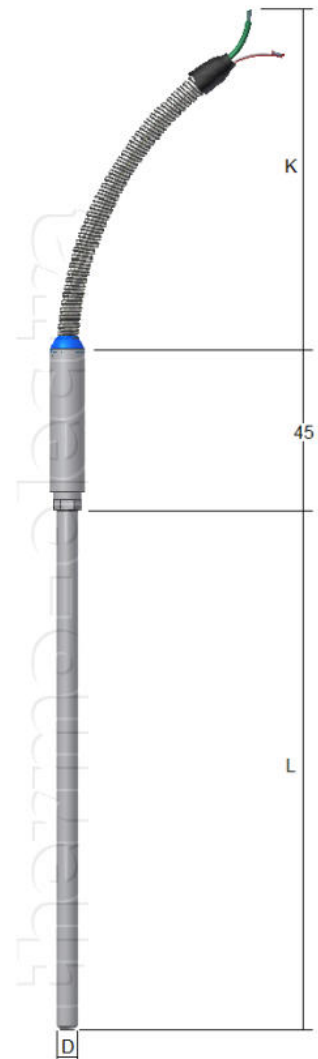

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	ME 1062				
Calibration					
Diameter "D" in mm					
Length "L" in mm					
Length "K" in mm					

H1-1 Rev.0 7/07