TE1060D Standard plug dual circuit



Applications	
Connector	Thermocouple and RTD for duplex circuits
Contacts	Ensuring good contact even in demanding applications
Materials	Glass filled thermoplastic body with originalthermocouple material pins
Temperature rating	
Temperature limit	Maximum 200°C
Construction	
Body	Glass filled thermoplastic material
Design	Central cover screw for quick wiring
Molded barriers	Prevent short circuit
Wire size	
Accepts wires	from 0,2 mm. to 2,0 mm.
Cable diameter	Maximum 8,0 mm

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

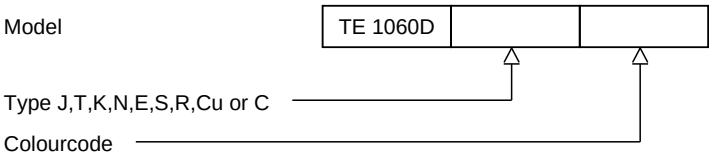

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands
Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
http://www.thermo-electra.com