


# TE1060D Standard plug dual circuit



## Applications

<b>Connector</b>	Thermocouple and RTD for duplex circuits
<b>Contacts</b>	Ensuring good contact even in demanding applications
<b>Materials</b>	Glass filled thermoplastic body with original thermocouple material pins

## Temperature rating

<b>Temperature limit</b>	Maximum 200°C
--------------------------	---------------

## Construction


<b>Body</b>	Glass filled thermoplastic material
<b>Design</b>	Central cover screw for quick wiring
<b>Molded barriers</b>	Prevent short circuit

## Wire size

<b>Accepts wires</b>	from 0,2 mm. to 2,0 mm.
<b>Cable diameter</b>	Maximum 8,0 mm

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

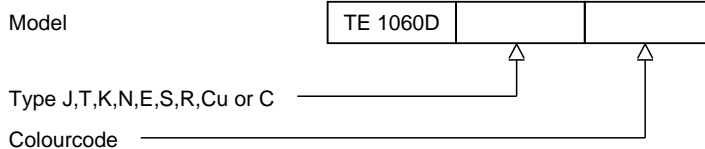

H9-1 Rev.0 7/07