



TE1110 Standard jack up to 540°C

Application	
Connector	Thermocouple and RTD circuits
Contacts	Spring loaded thermocouple contacts
Materials	Glass filled thermosetting material with original thermocouple material contacts
Temperature rating	
Temperature limit	Maximum 540°C (425°C continuous)
Construction	
Body	Glass filled thermosetting material
Design	Central cover screw for quick wiring
Molded barriers	Prevent short circuit
Wire size	
Accepts wires	from 0,2 mm to 2,0 mm.
Cable diameter	Maximum 8,0 mm.
Colour code	
Available colors	Brown only, Thermocouple calibration printed



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

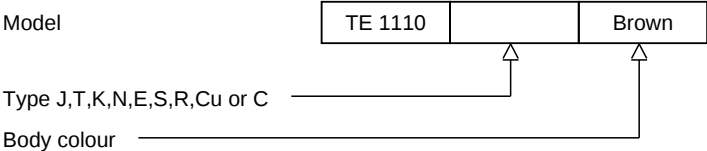

H9-1 Rev.0 7/07