


# TE1015 Standard jack



## Application

<b>Female connector</b>	Thermocouple and RTD circuits
<b>Contacts</b>	Springloaded thermocouple contacts
<b>Materials</b>	Glass filled thermoplastic body with original thermocouple material contacts

## Temperature rating

<b>Temperature limit</b>	Maximum 220°C
--------------------------	---------------

## Construction


<b>Body</b>	Glass filled thermoplastic material
<b>Design</b>	Central cover screw for quick wiring
<b>Molded barriers</b>	Prevent short circuit

## Wire size

<b>Accepts wires</b>	From 0,2mm. to 2,0mm.
<b>Cable jacket diameter</b>	Maximum 8,0mm.

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

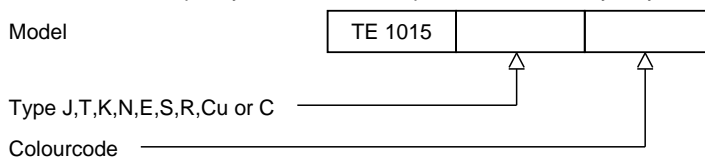

H9-1 Rev.0 7/07